
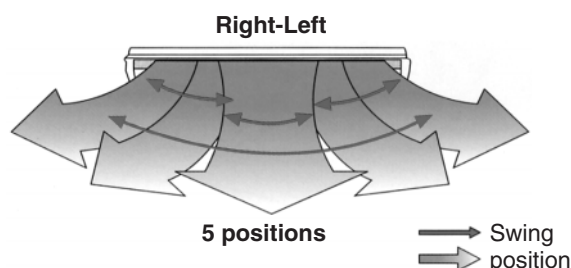


20 FLOOR-CEILING AIR CONDITIONER MU S/T "Eco" Series

MUNDCLIMA®


- Two types of installation
- High efficiency
- Low noise
- Easily changeable air filter
- Anti-rust protection
- Hidrophilic aluminum
- R407C "ecological gas"
- Mods. 36, 42 & 52 Only Ceiling

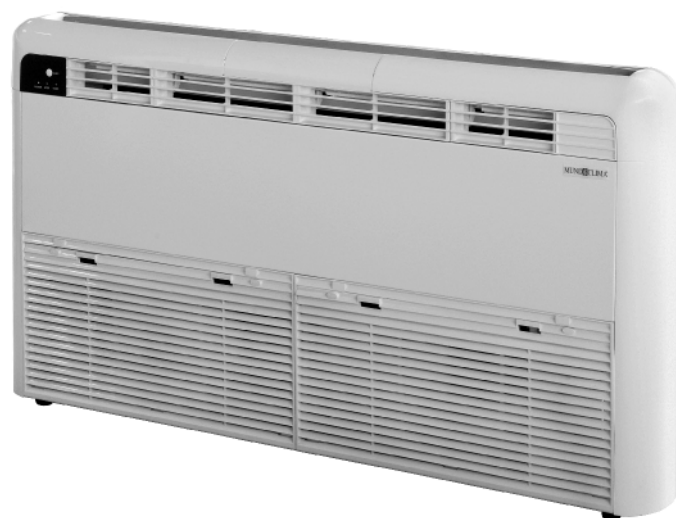

Big air flow dispersion:


The air distributio is made as big as possible, than to the air swing design.

The models 36, 42 and 52 the air swing can be positioned in five different places..

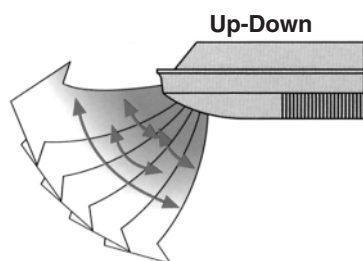

Low profile: Only 199 mm

The indoor unit has been designed with a double drainage system which reduces the inside gap. (only for models 14 and 18)

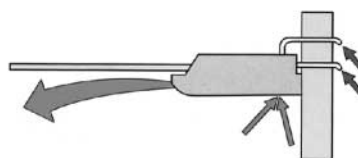

Air renovation:

There are some external air entries, in order to improve the quality of itself.

Technical specifications:

Model		MU S/T 14 HE	MU S/T 18 HE	MU S/T 24 HE	MU S/T 28 HE	MU S/T 36 HE	MU S/T 42 HE	MU S/T 52 HE
Part No.		CL 20 371	CL 20 372	CL 20 373	CL 20 374	CL 20 375	CL 20 376	CL 20 377
Cooling Capacity	BTU/h	14000	18000	24000	28000	36000	42000	52000
	W	4100	5200	7100	8200	10500	12300	15200
	Kcal/h	3526	4472	6106	7052	9030	10578	13072
Heating Capacity	BTU/h	17000	20000	27000	32000	41000	48000	65000
	W	5000	5800	7900	9300	12000	14000	19000
	Kcal/h	4300	4988	6794	7998	10320	12040	16340
Power consumption cooling	W	1700	2000	2700	3300	4000	4800	6000
Power consumption heating	W	1700	1900	2700	3400	3800	5000	6000
Voltage	V-Hz-Ph	230-50-1	230-50-1	230-50-1	230-50-1	400-50-3	400-50-3	400-50-3
Air flow (H/M/L)	m ³ /h	900/840/790			1300/1250/1150		1600/1400/1200	
Drying capacity	l/h	1,8	2,1	2,7	3	5	5	6
Noise level Indoor unit (H/M/L) dB(A)		48/44/38	48/44/38	48/44/38	48/44/38	—	—	—
Noise level Outdoor unit	dB(A)	49	52	58	58	64	64	64
Dimensions Indoor unit	mm	199x999x655			235x1320x690		235x1920x690	
Dimensions Outdoor unit	mm	640x780x250	680x815x288	840x948x340		1250x948x340		
Weight Indoor unit	Kg	30	30	30	46	48	48	48
Weight Outdoor unit	Kg	40	59	74	74	91	91	91
Gas pipe diameter	po	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"	3/4"
Liquid pipe diameter	po	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"
Pipe length max.	m	30	30	30	30	50	50	50
Unevenness max.	m	20	20	20	20	30	30	30