

19 AIR CONDITIONER WITHOUT OUTDOOR UNIT MU-WZ Series



- Low noise level
- High efficiency
- Easy installation: only two holes Ø162 mm
- Fresh air intake
- Remote control and front display
- EPDM rubber (patented) exterior grating
- MOD BUS connection (ideal for hotels)
- Super compact design
- Support resistance for low temperatures




EPDM rubber (patented) exterior grating



Two holes Ø162 mm




Fresh air intake

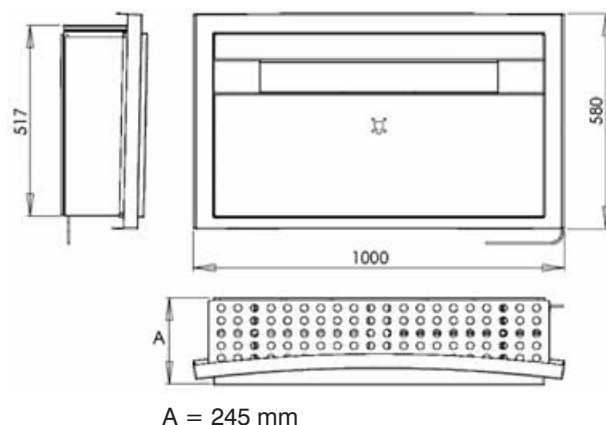

TECHNICAL SPECIFICATIONS:


Model		MU-WZ32
Code		CL 19 782
Cooling capacity	W	3,438
Heating capacity	W	3,516
Heating resistance	W	500
Power consumption (cooling-heating)	W	1,337 - 1,347 (+500 heat.resist.)
EER (type)		2.50 (B)
COP (type)		2.61 (B)
Air flow	m ³ /h	480
Fan speeds		3 + AUTO
Dehumidification capacity	l/h	1.16
Inside noise level	dbA	37 - 44 - 48
Outside noise level	dbA	41 - 50
MOD BUS connection		SI
Voltage	V/Hz	230 - 50
Dimensions (Width x Height x Depth)	mm	1,000 x 580 x 245
Weight	Kg	45
Diameter of holes in the wall	mm	162



Anti-odour and anti-bacterial filters



Safety box for remote control



On board control panel