



20 PORTABLE CONDITIONER MONOBLOC MUPO C4/H4 Series



Outlet tube



REMOVAL OF CONDENSED WATER

Removes the condensed water assuring the best humidity level in the room. Possibility of removal of condensed water through a water tank (with full tank alarm) or continuous discharge tube.



VENTILATION FUNCTION

Allows working only in fan mode.



THERMOSTAT

Keeps the selected temperature automatically



HOT AIR DISCHARGE TUBE

Easy and fast installation. Allows the use of the air conditioner immediately: pull down the back cover for coupling.



DEHUMIDIFYING

Reduces humidity restoring temperature



MUPO-07-C4
(Cool only)




MUPO-12-H4
(Heat pump)



Remote control INCLUDED



| Model | | MUPO-07-C4 | MUPO-12-H4 |
|---------------------------|-------------------|------------|------------|
| Code | | CL 20 080 | CL 20 081 |
| Cooling capacity | W | 2,100 | 3,530 |
| | BTU/h | 7,000 | 12,000 |
| | Kcal/h | 1,806 | 3,010 |
| Heating capacity | W | — | 3,230 |
| | BTU/h | — | 11,100 |
| | Kcal/h | — | 2,780 |
| Absorbed power Cooling | W | 1,000 | 1,420 |
| Absorbed power Heating | W | — | 1,380 |
| Dehumidification capacity | l/h | 0.8 | 1.25 |
| Air flow-rate (M/M/L) | m ³ /h | 370 | 380 |
| Voltage-Frequency | V-Hz | 230-50 | 230-50 |
| Sound level | dB(A) | 56 | 57 |
| Unit width | mm | 350 | 467 |
| Unit Height | mm | 749 | 765 |
| Unit depth | mm | 381 | 397 |
| Unit weight | Kg | 24 | 27 |

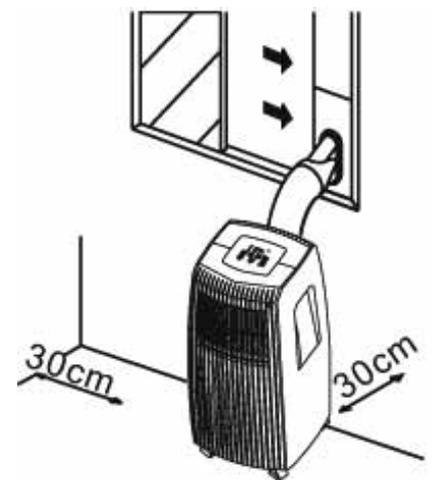

Window kit included