



20 PORTABLE AIR-CONDITIONER MONOBLOC MU-PO series



With outdoor discharge tube



AIR FILTER

Absorbs dust and air impurities.
Easy removal for cleaning and maintenance.



REMOVAL OF CONDENSED WATER

Removes the condensed water assuring the best humidity level in the room. Possibility of removal of condensed water through a water tank (with full tank alarm) or continuous discharge tube.



FAN FUNCTION

For "ONLY VENTILATION" mode.



ROTARY COMPRESSOR

Optimizes the efficiency. Low power requirement.



THERMOSTAT

Automatically keeps the desired temperature.




HOT AIR DISCHARGE TUBE

Easy and fast installation. Allows the use of the air conditioner immediately: pull down the back cover for coupling. (Long. 150 cm, Ø130 mm)




DEHUMIDIFICATION MODE

Reduces humidity, resetting an optimum temperature in damp or humid environments.

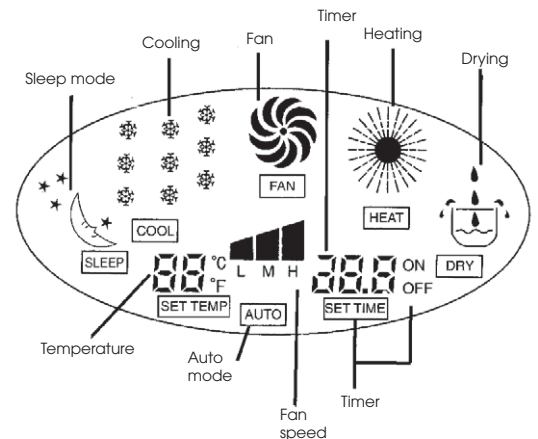

Function digital indicator

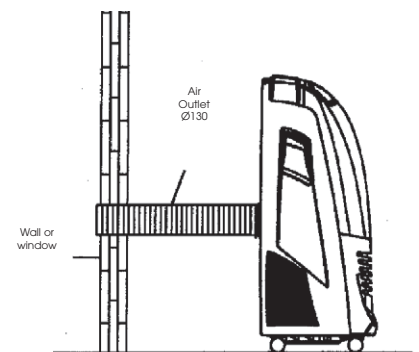

Mounting example

Model		MU-PO 11C	MU-PO 11R
Part No.		CL 20 091	CL 20 092
Gas		R407C	R407C
Cooling capacity	W	3,200	3,200
	BTU/h	11,000	11,000
	kcal/h	2,750	2,750
Heating capacity	W	–	2,000
	BTU/h	–	7,000
	kcal/h	–	1,750
Power requirement	W	1,100	1,100
Heating power consumption	W	–	2.050
Dehumidification capacity	l/h	2.2	2.2
Air volume	m ³ /h	355	355
Voltage-frequency	V-Hz	230-50	230-50
Noise level	dB(A)	52	52
Unit Width	mm	450	450
Unit Height	mm	856	856
Unit Depth	mm	370	370
Weight	kg	42	42