


20 DUCT CONDITIONERS SUPER SLIM Series SLIM LINE

- Super compact design
- 5 Ventilation Speed modes
- Low static pressure
- Filters included



COMPARISON DUCT SIZE

Model 24						
Series	Part Nr	W	H	D	m ³	% Reduction
MUC-24 HG	CL 20 764	800	220	450	0,08	0%
MUC-24 HF	CL 20 614	1000	298	800	0,24	67%
MUC-24 HF2	CL 20 644	920	270	570	0,14	44%
Model 36						
Series	Part Nr	W	H	D	m ³	% Reduction
MUC-36 HG	CL 20 765	1025	245	469	0,12	0%
MUC-36 HF	CL 20 616	1350	298	800	0,32	63%
MUC-36 HF2	CL 20 645	1140	270	710	0,22	46%

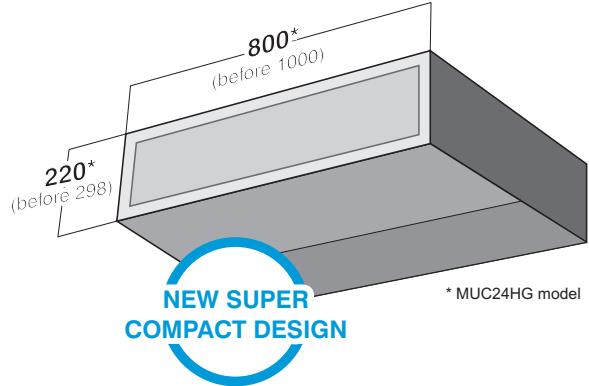

TECHNICAL SPECIFICATIONS:

Model	MUC 24 HG	MUC 36 HG
Part Nr.	CL 20 764	CL 20 765
Gas	R410A	R410A
COOLING capacity	kW	7
HEATING capacity	kW	7.2
Air flow (LOW/MED/HIGH)	m ³ /h	680/750/820
Static pressure	Pa	25
Power	V-Hz-Ph	220-240V/1PH/50HZ
Power consumption	W	2100
Noise Level Indoor unit (L/M/H)	dB(A)	41/43/45
Indoor unit dimensions	mm	800x450x220
Indoor unit weight	Kg	23
Outdoor unit dimensions	mm	870x320x650
Outdoor unit weight	kg	63
Filter	Synthetic washable	
Liquid pipe diameter	pulg	3/8"
Gas pipe diameter	pulg	5/8"
Drainpipe diameter	mm	20