

06 AIR CURTAINS FOR COMMERCIAL DOORS UP TO 2.2 m





RECESSED OPTIMA

- Self-supporting casing construction made of galvanized plated steel, ready to be installed recessed in a false ceiling.
- The inlet grille and the blow-out jet are integrated in a single aluminium frame, painted epoxy-polyester white colour RAL 9016.
- Low noise twisted cross-flow fans driven by a 2-speed external rotor motor.
- "P" type includes water heated coil. "E" type includes electrical shielded element, 2 power stages with power switches included. "A" type is without heating, air only.
- Control panel and infrared remote control IR included. 20 m of telephone cable with fast connectors type RJ45 (Plug & Play).
- Maximum recommended height 2.2 m.



Code	Model	Nominal airflow m ³ /h	Electrical heating capacity (kW)		Stages		Sound level dB(A)	Weight Kg
			1x230V		Heat			
EC 06 571	RO 1000 A	850/1350	-	-	-	2	41/50	24
EC 06 573	RO 1000 E	850/1350	-	4/6	2	2	41/50	26
EC 06 574	RO 1000 E230	850/1350	3.8/5.6	-	2	2	41/50	26
EC 06 575	RO 1500 A	1250/2050	-	-	-	2	43/52	34
EC 06 577	RO 1500 E	1250/2050	-	6/9	2	2	43/52	37.5
EC 06 578	RO 1500 E230-6	1250/2050	3.8/5.6	-	2	2	43/52	37.5
EC 06 579	RO 1500 E230-9	1250/2050	6/9	-	2	2	43/52	37.5
EC 06 580	RO 2000 A	1700/2700	-	-	-	2	46/55	44.5
EC 06 582	RO 2000 E	1700/2700	-	5.6/11.3	2	2	46/55	53.5
EC 06 583	RO 2000 E230	1700/2700	5.6/11.3	-	2	2	46/55	53.5

DIMENSIONS:

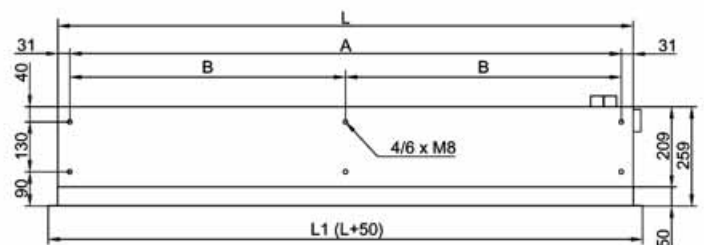

	L	L1	A	B
RO 1000	1000	1050	938	-
RO 1500	1500	1550	1438	-
RO 2000	2000	2050	1938	969

