

19 AIR CONDITIONER WITHOUT OUTDOOR UNIT MU-WZ Series



- Low noise level
- High efficiency
- Easy installation: only two holes Ø162 mm
- Fresh air intake
- Remote control and front display
- EPDM rubber (patented) exterior grating
- MOD BUS connection (ideal for hotels)
- Super compact design
- Support resistance for low temperatures




EPDM rubber (patented) exterior grating



Two holes Ø162 mm



Fresh air intake

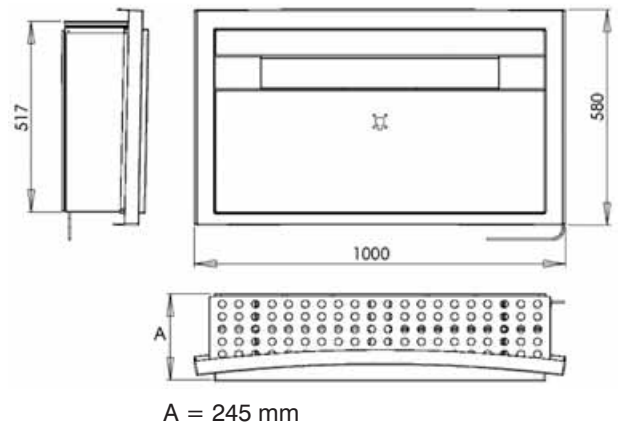

TECHNICAL SPECIFICATIONS:

Model	MU-WZ32	
Code	CL 19 782	
Cooling capacity	W	3.348
Heating capacity	W	3.516
Heating resistance	W	500
Power consumption (cooling-heating)	W	1.287 - 1.214 (+500 heat.resist.)
EER (type)	2,6 (A)	
COP (type)	3,1 (A)	
Air flow	m ³ /h	480
Fan speeds	3 + AUTO	
Dehumidification capacity	l/h	1,3
Inside noise level	dbA	49 - 46,5 - 43,8
Outside noise level	dbA	59,6 - 41,6
MOD BUS connection	SI	
Voltage	V/Hz	230 - 50
Dimensions (Width x Height x Depth)	mm	1,000 x 580 x 250
Weight	Kg	45
Diameter of holes in the wall	mm	162

