

# PORTABLE AIR CONDITIONERS MONOBLOC UNIT

## MUPO H8 Series with outlet pipe to the outside



**Ventilation function**  
It allows operation with only ventilation.



**Remote control**  
Includes wireless remote control.



**Air discharge tube to the outside**  
Easy and quick to install, it allows the use of the air conditioner immediately.




**Dehumidification**  
Moisture reduction restoring an optimum temperature in wet areas.



**Condensate removal**  
Removes condensate water so it is not necessary to connect the air conditioner to a drain. In dehumidification mode and in very humid environments, it is recommended to connect the equipment to a drain.



**Follow Me Function (iFEEL)**  
The wired remote control adds a temperature sensor.

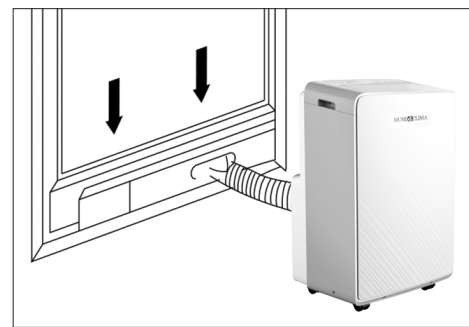

Window kit included

### TECHNICAL SPECIFICATIONS

MODEL			MUPO-09-H8	MUPO-12-H8
Code			CL 20 010	CL 20 011
Cooling	Nominal capacity	kW	2.6	3.4
	Nominal consumption PEER	kW	0.92	1.28
	EERd	W/W	2.6	2.6
	Energy labeling		A	A
	Electricity Consumption QSD	kWh/h	0.911	1.278
Heating	Nominal capacity	kW	2.3	2.7
	Nominal consumption PCOP	kW	0.735	0.97
	COPd	W/W	3.1	2.8
	Energy labeling		A+	A+
	Electricity Consumption QSD	kWh/h	0.7	0.962
Power consumption in thermostat-off mode PTO		W	-	-
Standby power consumption PSB		W	0.378	0.378
LWA sound power level		dB(A)	63.9	63.8
Power supply		V-Hz-Ph	220-240V~ 50Hz, 1Ph	
Max. intensity		A	4.5	8
Air flow rate	Interior	m <sup>3</sup> /h	400	350
	Exterior	m <sup>3</sup> /h	550	550
Diameter of air discharge hose		mm	150	150
Refrigerant	Type / PCA		R290 / 3	
	Amount	kg / TCO <sub>2</sub> eq	0.2 / 0.0006	0.21 / 0.00063
Dimensions (W x D x H)		mm	476 x 385 x 710	
Weight		kg	32.5	33.5

Warning: 1. Data and specifications are subject to changes without previous notice.  
2. The values of noise level match with values obtained in the anechoic chamber.