

CENTRIFUGAL PUMP WITH TANK EASY TANK & EASY TANK PRO


MUND^{CLIMA}

For air conditioners and climate control units

USES:

- Floor-ceiling units
- Cassette units
- Duct units
- Refrigerated cabinets
- Evaporators

DIMENSIONS:

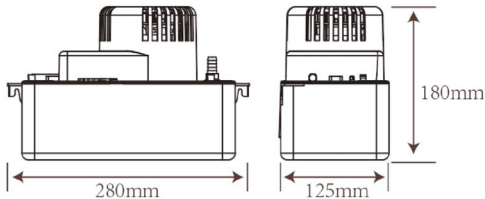


Codes:
EASY TANK: AS 06 808
EASY TANK PRO: AS 06 809

TECHNICAL SPECIFICATIONS:

Model	Voltage and Frequency	Nominal rating		Capacity at:			Max. height	Sound level	Connection diameter	Max. temp.	Tank
				0.3 m	1.5 m	2.7 m					
EASY TANK	230 V ~ 50 Hz	0.7 A	85 W	440 L / h	387 L / h	239 L / h	5.2 m	25 dB(A)	9.52 (mm)	60 °C	2.2 L
EASY TANK PRO		1.3 A	125 W	500 L / h	446 L / h	350 L / h	7.3 m				

REAL FLOW RATES (l/h)


EASY TANK

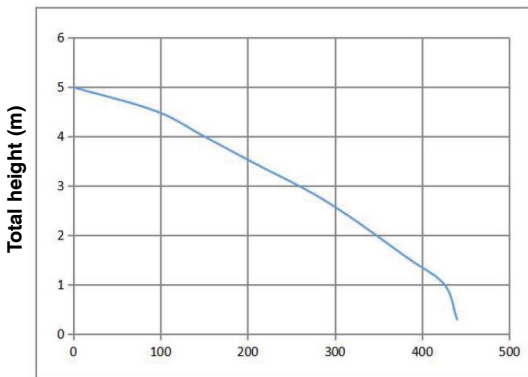

Capacity (L/h)

REAL FLOW RATES (l/h)

EASY TANK PRO

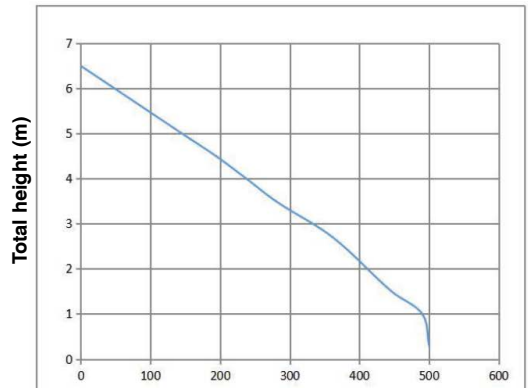

Capacity (L/h)