


AIR CURTAIN TO BUILD-IN (without heating) MU-EMP (ECO) Series





Height from 2.5 to 3.5 m

FEATURES

- Specially designed for ceiling installation.
- Metallic casing.
- 3-speed motor.
- Remote control.
- Installation height: 3.5 m.




MU-EMP

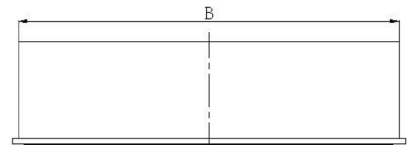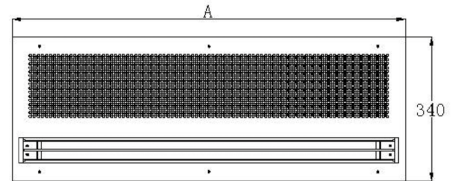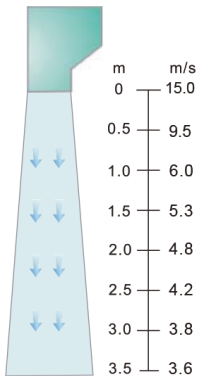

Model	A	B
MU-EMP 09	930	900
MU-EMP 12	1,230	1,200
MU-EMP 15	1,530	1,500

TECHNICAL FEATURES

Model			MU-EMP 09	MU-EMP 12	MU-EMP 15
Code			EC 06 467	EC 06 468	EC 06 469
Unit length		mm	900	1,200	1,500
Power supply		V / Ph / Hz	220 - 240 / 1 / 50	220 - 240 / 1 / 50	220 - 240 / 1 / 50
Motor power	H (high)	W	295	360	455
	M (medium)	W	217	272	333
	L (low)	W	175	235	272
Air outlet speed	H (high)	m/s	15	15	15
	M (medium)	m/s	12.5	12.5	12.5
	L (low)	m/s	10	10	10
Air flow rate	H (high)	m³/h	1,020	1,360	1,700
Sound level	H (high)	dB(A)	53	54	56
	L (low)	dB(A)	51	52	54
Net weight		kg	17.2	21.8	29.1

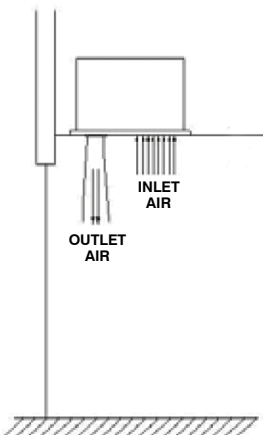

1. Available with nominal tension and personalized frequency.
2. The pressure level is heard at 1m distance under the air outlet.
3. Standard units are equipped with European plugs.
4. Customized plugs available.