



V4+ Protocol


1x1 WALL SPLIT MUPR-H14X Series

- Built-in presence sensor for energy saving
- Humidity control (between 35% and 85%)
- Multifunction module included (ON/OFF port and central control)
- Save time on installation and maintenance!
- Disassemble the indoor unit in under 1 minute



SEER
A+++
of up to
9.5

SCOP
A++ (1)

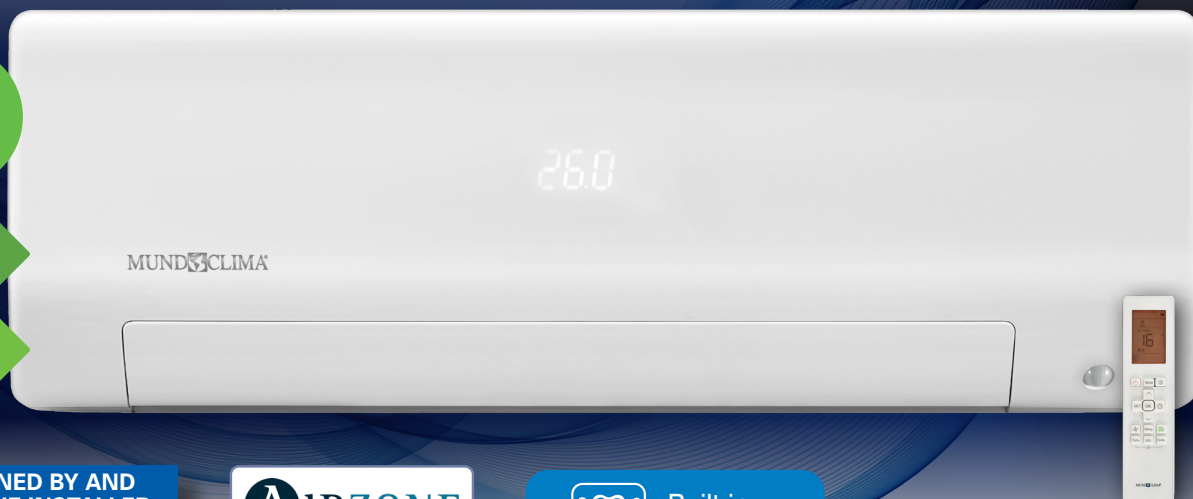

DESIGNED BY AND
FOR THE INSTALLER
*You've never seen anything
like that*

AIRZONE
COMPATIBLE



Built-in
Ionizer

RG10L5(G2HS)/BGEF
Included
(CL09110)

OPTIONALS

Wired control with WIFI



KJR-120N(X4W)/BGEF
(CL09211)



KJR-120P(X6W)/EF
(CL09214)



MD-AC-MBS
(CL99097)



MD-AC-KNX
(CL94792)



INBACMID
(CL99222)

BMS

More information on optional features in the "CONTROL SYSTEMS" section.

Centralised control



CCM180A/WS
(CL09300)



CCM30/BKE
(CL92871)

AIDOO Airzone WIFI



AZAI6WSCGM1
(CO48080)

Accessories



M-CHECK
(CL09410)

(1) A++ SCOP in mild climate zone, except for model 24 - see specification table.

MORE AIR, MORE EFFICIENT... MORE FRESH, MORE PURE

78.4% Air outlet
Equipment length


MORE EFFICIENCY

Thanks to the front positioning of the electrical panel, the air inlet and outlet space is increased, allowing the H14X series to deliver superior performance.


FRESH AIR (ION)



Built-in ionizer that generates OH(-) ions to purify the air by deactivating bacteria, viruses, and other pathogens, providing a pleasant sensation of freshness.

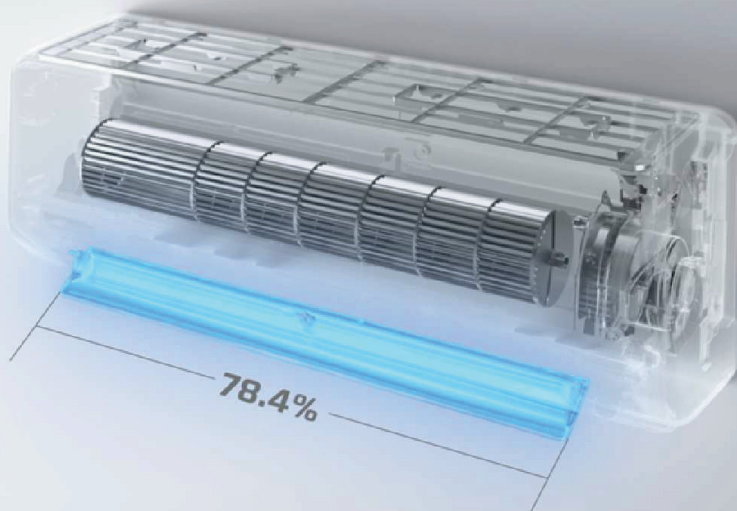

MINIMIZES THE MOST COMMON TASKS

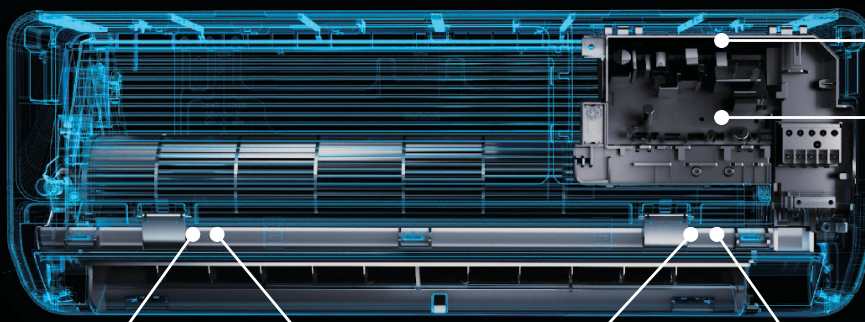

Easy disassembly of components:
Turbine, fan motor, condensate tray

Disassembly tabs

Air filter held in place with magnets

Front electrical panel

Only 1 screw on each

H14X SERIES
vs OTHERS

41% Faster installation

86% Faster maintenance

76% Faster PCB replacement

= **1/5** of the time with the new MUPR-H14X compared to a conventional air conditioner

PRESENCE SENSOR




After 30 minutes of no activity in the room, the unit automatically reduces the operating frequency to save energy.



When activity is detected again in the room, the unit resumes the initial operation.

INDOOR UNIT INSTALLATION

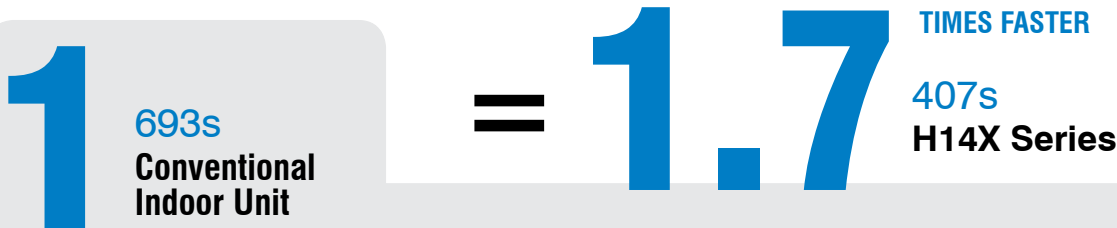

Position adjustment



Difficult electrical connection



Small connection space



Large distance from the wall

PCB REPLACEMENT



Disassembly 1172s | Assembly 1543s



Disassembly 72s | Assembly 1263s

DISASSEMBLY OF THE FAN MOTOR




Open the front panel




Remove the 2 screws



Remove the bottom panel




Open the electrical panel and disconnect the fan, flaps and ionizer motors




Open the rear tabs and remove the entire ventilation train, including the condensate tray

EASY CONNECTION

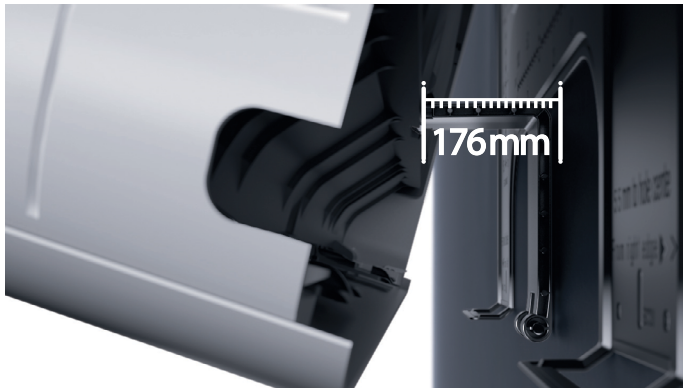


Wide space of **176 mm** for pipe connection

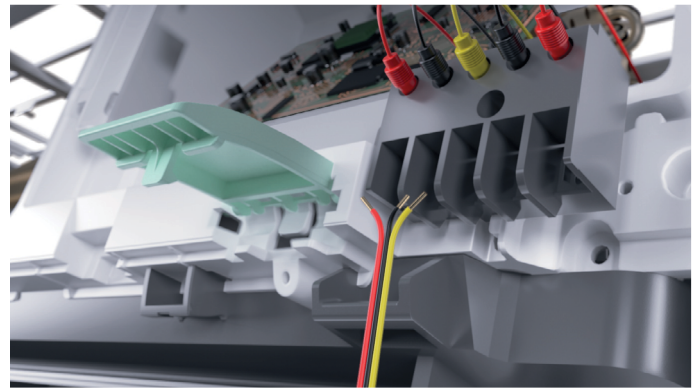


Easy-access front electrical panel, simply open the front panel - **Only 3 seconds**

EASY POSITIONING WITHOUT AUXILIARY TOOLS


The mounting plate incorporates measuring range and spirit level - **Measure and mark the position of the equipment using the mounting plate and nothing more.**

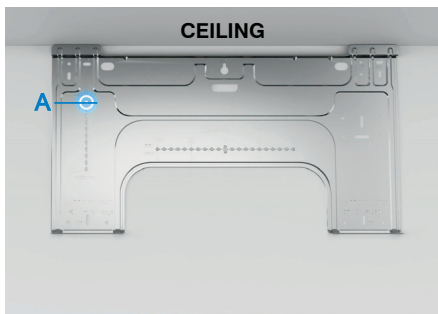

1st STEP: Place the plate against the ceiling, mark point A according to the desired height

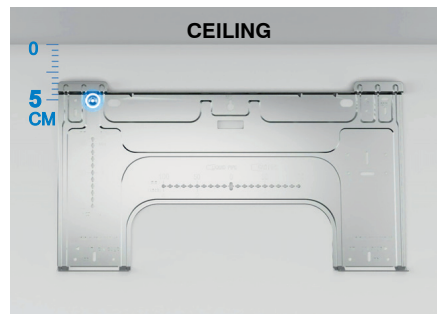

2nd STEP: Move the plate down until the fixing hole reaches point A

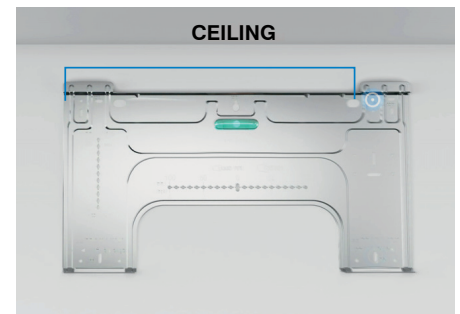

3rd STEP: Locate the fixing point on the other side with the help of the spirit level

INSTALLATION FLEXIBILITY



Can be installed at only **5 cm** from the ceiling

EASY TO CLEAN



It is not necessary to open the front panel to access the air filter: thanks to its 6 magnets, the filter can be disassembled and reassembled with a single soft "click"

PREMIUM MULTIFUNCTION REMOTE CONTROL




RG10L5(G2HS)/BGEF
(CL09110)

LARGE BACKLIT DISPLAY

The RG10 remote control features a large display to show all the functions of the new equipment, for example:

- Fan speed adjustment from 1% to 100%, in 1% increments
- Functions: “Eye”, “Breeze Away”, “Sleep”, “Follow me”, “Clean”, “Fresh”, “Turbo”, “LED”, “Swing”, “ECO”, “Gear” and “Timer”

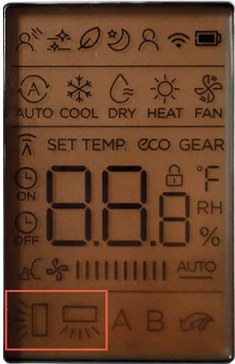

MULTIPLE CONFIGURATIONS

It also allows the adjustment of different functions of the equipment

Set the parameters as desired:

Function	Adjustment
Auto-Restart function	Active / Inactive
Temperature compensation	Adjust the value from 0 °C to 6 °C
Fan speed setting	Adjust fan speed as desired
Temperature range setting	Minimum cooling from 16 °C up to 24 °C; Maximum heating from 30 °C down to 25 °C

and much more!

SAVE TIME IN MAINTENANCE

Finally, the new remote control also allows you to check operating parameters

Check the operating frequency or temperature of all sensors of the equipment easily through the indoor unit's display.



ENGINEERING MODE MANUAL

Download the engineering mode manual from this QR code and... discover all the possibilities!

MUPR-H14X Series

TECHNICAL SPECIFICATIONS

Model			MUPR-09-H14X	MUPR-12-H14X	MUPR-18-H14X	MUPR-24-H14X
Code			CL20060	CL20061	CL20062	CL20063
EAN Code			8432953058319	8432953058326	8432953058333	8432953058340
Cooling	Nominal capacity (min. ~ max.)	kW	2.72 (1.32 ~ 3.81)	3.52 (1.32 ~ 3.96)	5.28 (1.99 ~ 6.13)	7.03 (2.11 ~ 8.21)
	Nominal consumption (min. - max.)	kW	0.62 (0.13 - 1.20)	0.95 (0.13 - 1.25)	1.31 (0.16 - 1.78)	1.76 (0.42 - 3.20)
	Pdesignc (design capacity)	kW	2.7	3.5	5.3	7.0
	SEER	W/W	9.5	8.5	8.5	8.5
	Energy Efficiency Class		A+++	A+++	A+++	A+++
	Annual electricity consumption	kWh/year	99	144	220	288
Heating	Nominal capacity (min. ~ max.)	kW	3.13 (0.88 ~ 4.4)	3.96 (0.88 ~ 4.54)	5.57 (1.35 ~ 6.77)	7.33 (1.55 ~ 8.21)
	Nominal consumption (min. ~ max.)	kW	0.68 (0.12 - 1.40)	0.99 (0.12 - 1.45)	1.50 (0.23 - 1.69)	1.97 (0.30 - 3.10)
	Mild climate zone	Pdesignh (design capacity)	kW	2.5	4.3	5.0
		SCOP	W/W	4.6	4.6	4.2
		Energy Efficiency Class	A++	A++	A++	A+
		Annual electricity consumption	kWh/year	761	1400	1666
	Warm climate zone	Tbiv (bivalent temperature)	°C	-7	-7	-7
		Pdesignh (design capacity)	kW	2.5	4.3	5.5
		SCOP	W/W	5.6	6.0	5.3
		Energy Efficiency Class	A+++	A+++	A+++	A+++
	Cold climate zone	Annual electricity consumption	kWh/year	625	1118	1453
		Tbiv (bivalent temperature)	°C	2	2	2
		Pdesignh (design capacity)	kW	2.5	4.3	5.0
		SCOP	W/W	3.8	3.6	3.3
	Cold climate zone	Energy Efficiency Class	A	A	A	B
		Annual electricity consumption	kWh/year	1989	3733	4645
		Tbiv (bivalent temperature)	°C	-10	-10	-10
		Tol (Operation limit temperature)	°C	-15	-15	-15
Dehumidification	Capacity	L/day	24	28.8	43.2	62.4
Indoor unit	Model		MUPR-09-H14X-I	MUPR-12-H14X-I	MUPR-18-H14X-I	MUPR-24-H14X-I
	EAN Code		8432953058531	8432953058548	8432953058555	8432953058562
	Air flow rate (Turbo / High / Medium / Low)	m³/h	760/530/360/280	760/560/380/290	835/685/580/400	1540/1092/724/379
	Sound pressure (High / Medium / Low / Silence) ⁽¹⁾	dB(A)	40/32/21.5/20.5	41/36/22/21	41/35/23/22	44.5/40/33/21
	Sound power (High) ⁽¹⁾	dB(A)	55	55	59	64
	Dimensions (W x H x D)	mm	848 x 300 x 230	848 x 300 x 230	1017 x 319 x 242	1,190 x 371 x 280
	Weight	kg	10.2	10.2	12.3	20
Outdoor unit	Model		MUPR-09-H14X-E	MUPR-12-H14X-E	MUPR-18-H14X-E	MUPR-24-H14X-E
	EAN Code		8432953058425	8432953058432	8432953058449	8432953058456
	Air flow rate (max.)	m³/h	2,150	2,150	3,500	3,500
	Sound pressure (High) ⁽¹⁾	dB(A)	55	55	56	58.5
	Sound power (High) ⁽¹⁾	dB(A)	57	59	65	67
	Dimensions (W x H x D) ⁽²⁾	mm	765 x 555 x 303	765 x 555 x 303	890 x 673 x 342	890 x 673 x 342
	Weight	kg	26.4	26.4	38.8	45.6
Refrigerant	Type / GWP		R32 / 675			
	Charge	kg	0.62	0.62	1.1	1.5
	CO ₂ equivalence	TCO ₂ eq	0.42	0.42	0.74	1.01
	Precharge until	m	5	5	5	5
	Additional charge (from 5 m)	g/m	12	12	12	24
Refrigerant piping	Liquid	inches	1/4"	1/4"	1/4"	3/8"
	Gas	inches	3/8"	3/8"	1/2"	5/8"
	Max. length	m	25	25	30	50
	Max. height difference	m	10	10	20	25
Electrical data ⁽³⁾	Power supply	V / Hz / Ph	220-240 ~ / 50 / 1N			
	Maximum consumption	kW	2.20	2.20	2.80	3.70
	Max. current	A	10.5	10.5	13	19
	Power cable (outdoor unit)	mm²	2 x 1.5 + T	2 x 1.5 + T	2 x 1.5 + T	2 x 2.5 + T
	Interconnection cable	mm²	4 x 1.5 + T	4 x 1.5 + T	4 x 1.5 + T	4 x 2.5 + T
	Operating temperature	°C	16 ~ 32 / 0 ~ 30	16 ~ 32 / 0 ~ 30	16 ~ 32 / 0 ~ 30	16 ~ 32 / 0 ~ 30
Operating temperature	Indoor (Cooling / Heating)	°C	-15 ~ 50 / -15 ~ 24	-15 ~ 50 / -15 ~ 24	-15 ~ 50 / -15 ~ 24	-15 ~ 50 / -15 ~ 24
	Outdoor (Cooling / Heating)	°C	-15 ~ 50 / -15 ~ 24	-15 ~ 50 / -15 ~ 24	-15 ~ 50 / -15 ~ 24	-15 ~ 50 / -15 ~ 24

Notes: ⁽¹⁾ The values of sound level were obtained in a semi-anechoic chamber.

⁽²⁾ The dimensions are for the unit body, they do not include protruding elements (valve covers, grids, handles, etc.). For detailed dimensions, please refer to the installation manual.

⁽³⁾ The electrical wiring sections indicated are recommended, but may be higher depending on each installation, these must be adapted to the applicable electrical regulations.



Warnings: - Data and specifications can be changed without previous notice.

ELECTRICAL INSTALLATION

Model	Electrical wiring (A)	Interconnection wiring (B)
MUPR-09-H14X	2 x 1.5+T	4 x 1.5+T
MUPR-12-H14X	2 x 1.5+T	4 x 1.5+T
MUPR-18-H14X	2 x 1.5+T	4 x 1.5+T
MUPR-24-H14X	2 x 2.5+T	4 x 2.5+T

REFRIGERATING INSTALLATION (R-32)

Model	Piping		Max. Length (B)	Max. height difference (A)	Precharge until (m)	Additional charge (g/m)
	Liquid	Gas				
MUPR-09-H14X	1/4"	3/8"	25	10	5	12
MUPR-12-H14X	1/4"	3/8"	25	10	5	12
MUPR-18-H14X	1/4"	1/2"	30	20	5	12
MUPR-24-H14X	3/8"	5/8"	50	25	5	24

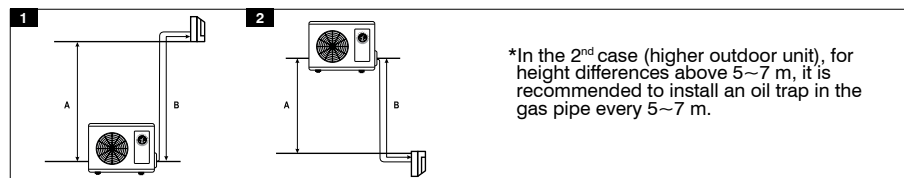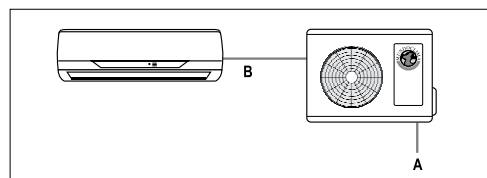

Features Description

Comfort



WEEKLY TIMER
Sets the weekly operation of the unit.



FOLLOW ME FUNCTION (iFEEL)
The remote control incorporates an ambient temperature sensor.



AUTOMATIC RESTART
Recovery of the parameters before the electrical cut.



EMERGENCY OPERATION
Possibility of manually operating the unit with the button in case of any alarms sounding.



COLD AIR PRECAUTION
When heating, the initial fan speed is adjusted according to the battery temperature.



TURBO OPERATION
Maximum reduction of the cooling/heating time.



LOW SOUND LEVEL
Thanks to the Silence mode and its new design, the sound level is reduced to the minimum.



TEMPERATURE COMPENSATION
The remote control allows you to adjust the compensation temperature for the heating and cooling mode.



FRESH AIR (ION)
The equipment incorporates an ionizer to generate OH(-) and thus purify the air by deactivating bacteria, viruses and other contaminants in the environment, providing a very pleasant feeling of freshness.



BREEZE AWAY
Function that allows the air flow to be diverted to another place to prevent the equipment from blowing directly on people.



QUIETER OUTDOOR UNIT
Optimized design of air outlet grille with noise reduction of 3.3 dB(A) compared to previous models.



WIDE WORKING RANGE
Cooling operation until 50 °C and -15 °C in heating.



NIGHT MODE
Makes the unit operate according to the preset nighttime temperature curve, which creates an ideal nighttime environment and improves sleep quality.



DAILY TIMER
The timer can be set to start and stop at any point in a 24-hour period.



360° DESIGN
Thanks to the 360° panel design, the air is more evenly distributed.



HORIZONTAL AND VERTICAL FLAP ROTATION
Better air distribution thanks to the flap's horizontal and vertical automatic swing.



GEAR
Allows to set the equipment capacity to 50 %, 75 % or 100 % (default).



COLD CATALYST FILTER
The equipment features a purifying filter that can absorb formaldehyde without needing ultra-violet light.



SPRINT START
Like a sprinter, this function allows the compressor to reach 65 Hz in just 6 s.



HUMIDITY CONTROL
In dehumidification mode, the relative humidity control can be set between 35 % and 85 %.



VENTILATION FUNCTION
Allows operation with only ventilation.



THERMOSTAT
It automatically maintains the set temperature.



DEHUMIDIFICATION
Humidity reduction helps restore an optimum temperature in wet areas.



MULTI-SPEED INDOOR FAN
The fan has up to 12 different speeds that are automatically adjusted if the automatic ventilation is activated.



SILENCE
This function allows you to select the ultra-quiet speed, so that the sound level of the equipment is very low.



CONTROL PANEL
A control panel is added to run the machine without any wireless remote control.



DUAL AIR FLOW
Top and bottom air outlet. In cooling mode only the upper outlet works, and in heating mode both outlets work, thus heating from ground level.



CORE GENIUS
The frequency of traditional Inverter equipment has a fluctuation of ± 1 °C of the ambient temperature during operation. However, with the new "CORE GENIUS" Inverter technology that adjusts 0.6 Hz for each step, the frequency variation of the Inverter is so smooth that the ± 0.5 °C fluctuation of the ambient temperature is not noticeable.



INDIVIDUAL FLAP CONTROL
Possibility to adjust the angle of the 4 flaps independently.



120°
The upper slat allows an adjustment at 120°.



BACKLIT WALL CONTROL
The new KJR-120N wired wall controller features a backlit screen for easy reading.



HEATING 8 °C
The unit automatically switches to heating mode when the ambient temperature is below 8 °C, thus preventing the room temperature from being too low when we are not at home.

Connectivity



WIFI
Possibility for the unit to be controlled via WIFI, through an APP.



CENTRALIZED CONTROLLER
Possibility of controlling several units with the same controller.



DOMOTICS
Possibility of connection with the main manufacturers of home automation systems (Consult).

Energy efficiency



ENERGY LABELLING FOR COOLING A+++



ENERGY LABELLING FOR HEATING A+++



ENERGY LABELLING FOR COOLING A++



ENERGY LABELLING FOR HEATING A++



ENERGY LABELLING FOR COOLING A+



ENERGY LABELLING FOR HEATING A+



ENERGY LABELLING FOR COOLING A



ENERGY LABELLING FOR HEATING A



STANDBY FUNCTION (ONLY 1W IN STANDBY)
The outdoor unit is automatically disconnected from the power supply when the unit is in standby, that way the consumption in standby mode is only 1W.



PRESENCE SENSOR
Detects inactivity (30 min) in the room to reduce the operating frequency and thus save energy.

Refrigerant



R410A
Equipment using refrigerant R410A with a GWP of 2088.



R32
Equipment using the most environmentally friendly refrigerant R32 with a GWP of 675. In order to install equipment with R32 refrigerant gas, you must review the current legislation.



R290
Equipment using the new refrigerant R290 which has a GWP of only 3.



REMOVABLE FILTERS

New filter fastening system with tabs to ensure correct fastening without vibrations.



OUTSIDE AIR INLET

Possibility of supplying outdoor air directly on the indoor unit.



DRAINAGE PUMP

Incorporates drainage pump to facilitate the drainage of the indoor unit.



REMINDER OF FILTER'S CLEANING

The equipment tells us when to clean and/or replace the air filter of the indoor unit.



PIPE COMPATIBILITY

Possibility of increasing one size over the standard diameter in the gas or liquid pipe or both.



DIGITAL LED DISPLAY

Equipment with a digital display showing the set temperature during normal operation or the ambient temperature in ventilation mode.



LESS SCREWS

Both the indoor unit and the outdoor unit have less screws, to make the disassembly easier.



REFRIGERANT LEAK DETECTION

The unit automatically detects the existence of possible leaks of refrigerant in the circuit.



SELF-CLEANING

This function performs a self cleaning on the indoor unit. When the "SELF-CLEANING" function is activated (SelfClean or iClean buttons), the unit initially operates in cooling mode with the fan at low speed, during this period the condensation water drags the dust from the battery. The unit then switches to heating mode with the fan at low speed, to dry the battery and the inside of the unit. Finally the unit changes to ventilation mode to finish drying completely.



ULTRA-REINFORCED MOUNTING PLATE

Reinforced mounting plate with measuring range and spirit level included.



POWER SUPPLY ONLY TO OUTDOOR UNIT

The indoor unit is powered by the same interconnection cable with the outdoor unit.



SINGLE-FAN OUTDOOR UNITS

Optimize outdoor space thanks to outdoor units with lower height.



HIGH STATIC PRESSURE

Wide static pressure range.



SET TEMPERATURES RANGE ADJUSTMENT

The remote control is able to adjust: minimum cooling from 16 °C up to 24 °C; maximum heating from 30 °C down to 25 °C.



LEG IN U FORM

Thanks to the new back leg in the outdoor unit, the installation is easier.



LOW VOLTAGE START

The equipment can start up and operate normally up to a supply voltage lower than the nominal voltage.



PROBLEM SOLVING

Error codes are displayed on the indoor panel, on the wall control or on the outdoor PCB.



REMOTE SIGNALS (CP)

The indoor unit has an ON/OFF input.



CONFIGURABLE STATIC PRESSURE

From the PCB (or any model with the wireless or wired remote control) the static pressure of the fan can be adjusted, so that the machine can be adapted to each installation.



CONFIGURABLE RETURN

The air intake can be set up either at the rear or at the bottom of the unit. By default, it is set up at the rear.



TWIN FUNCTION (2x1)

Two indoor units can be connected to the same outdoor unit. Both indoor units will function identically as if they were one single unit. It is perfect for open rooms.



REVERSE ROTATION

When the unit is stopped, the outdoor unit fan rotates backwards to remove leaves or other external elements from the coil.



ROTATION & BACK UP

This function allows redundant operation in installations with 2 units connected to the same KJR-120N wired controller, in the event that one machine does not reach the set temperature, the two machines will automatically start operating together at 24 °C in the selected mode. At the same time a rotation in the operation of the 2 machines is carried out so that both machines operate for the same amount of time.



AUTO ROUTING

The outdoor unit can assign addresses to the indoor units automatically.



ENGINEERING MODE

Function adjustment and operating parameters query using the control.



EXTRA FLAT DUCT

Indoor unit height between 200 and 300 mm.



DELIVERY OUTLET TO ADJACENT ROOM

The unit has pre-drilled outlets for connecting a small duct to climatize an adjacent room.



AIR DISCHARGE TUBE TO THE OUTSIDE

Easy and quick to install, it allows the use of the air conditioner immediately.



CONDENSATE REMOVAL

Removes condensate water so it is not necessary to connect the air conditioner to a drain. In dehumidification mode and in very humid environments, it is recommended to connect the equipment to a drain.



PANEL OF COMPACT SIZE

The grid panel of the cassette type unit measures 600x600 mm.



GOLDEN FIN

Heat exchanger with special treatment, which protects the equipment against atmospheric phenomena and the effects of aggressive environments. It also prevents the proliferation of bacteria and mold.



BLUE FIN

Heat exchanger with treatment that protects the equipment against corrosion and the growth of bacteria and mold.



AUTOMATIC REFRIGERANT REFILL

Allows the system to be refilled with refrigerant gas without having to do any additional calculation.



HORIZONTAL / VERTICAL

Equipment that can be installed in both horizontal and vertical position.



META FUNCTION

Advanced air conditioning technology that optimizes temperature, refrigerant and air flow to save energy and maximize the comfort.



SUPER DC

Equipment that has both, DC Inverter compressor and DC fan motors.



COOLING AT LOW TEMPERATURES

Cooling operation down to -15 °C outside.



HEATING AT LOW TEMPERATURES

Heating operation down to -25 °C outside.



CONSTANT AIR FLOW CONTROL

The indoor fan adjusts to the required static pressure to ensure a constant air supply at all times.



DC

Unit with DC fan motor, low noise and low-energy consumption.



EVI COMPRESSOR

High efficiency asymmetric scroll compressor with steam injection technology.



0-10V INPUT

Unit with DC fan motor with 0-10V regulation.



0-10V OUTPUT

Equipment with 0-10V output for the control of an auxiliary valve.



7 SPEED FAN

Unit with DC fan motor with 7 speeds.



EXTERNAL FAN DIFFERENT SPEEDS

Accurate adjustment of fan speed thanks to the DC motor.



EXV

Equipment with an electronic expansion valve that adjusts the capacity of the equipment in a more stable way.