

PORTABLE AIR CONDITIONERS MONOBLOC UNIT

MUNDCLIMA®

MUPO Series H9

with outlet pipe to the outside and remote control



Ventilation function
It allows operation with only ventilation.



Remote control
Includes wireless remote control.



Air discharge tube to the outside
Easy and quick to install, it allows the use of the air conditioner immediately.




Dehumidification
Moisture reduction restoring an optimum temperature in wet areas.



Condensate removal
Removes condensate water so it is not necessary to connect the air conditioner to a drain. In dehumidification mode and in very humid environments, it is recommended to connect the equipment to a drain..



Follow Me Function (iFEEL)
The IR remote control adds a temperature sensor.

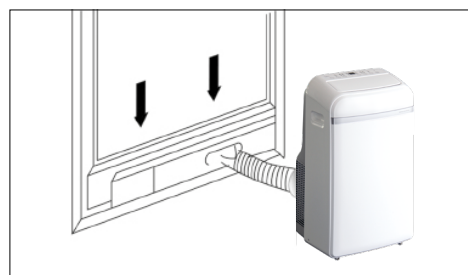

Window kit included

TECHNICAL SPECIFICATIONS

Model		MUPO-12-H9	
Code		CL20014	
Cooling	Nominal capacity	kW	3,5
	Nominal consumption P _{EER}	kW	1,4
	EERd	W/W	2,6
	Energy labeling		A
	Electricity Consumption Q _{SD}	kWh/60min.	1,4
Heating	Nominal capacity	kW	2,9
	Nominal consumption P _{COP}	kW	1,1
	COPd	W/W	2,8
	Energy labeling		A+
	Electricity Consumption Q _{SD}	kWh/60min.	1,1
Power consumption in thermostat-off mode P _{TO}		W	1
Standby power consumption P _{SB}		W	0,5
Sound power level L _{WA}		dB(A)	64
Power supply		V-Hz-F	220-240V~ 50Hz, 1Ph
Max. Current		A	8
Air flow rate	Indoor	m ³ /h	420/370/355
	Outdoor	m ³ /h	535
Air discharge hose (Diameter / Máx. Length)		mm	150 / 1500
Refrigerant	Type / GWP		R290/3
	Amount	kg / TCO ₂ EP	0,22 / 0,0
Dimensions (W x D x H)		mm	467 x 397 x 765
Weight		kg	33,2

Warning: 1. Data and specifications are subject to changes without previous notice.
2. The values of noise level match with values obtained in the anechoic chamber.