

# CONDENSATE REMOVAL PUMP EASY CORNER

## DESCRIPTION:

The Easy Corner pump is ideal for easy installation on wall-mounted equipment, including the entire condensate drainage system integrated in an L-shaped trough for quick and easy installation.

- LOW SOUND LEVEL
- High flow rate
- Soft start
- Safe and reliable water detection with capacitive sensor
- Easy cleaning

## FEATURES:

**Power supply:** 100-240 V AC 50/60 Hz < 4 W

**Maximum flow rate automatic adjustment:**

**Low mode:** 12 L/h, 17 dB(A) @ 1 M

**High mode:** 18 L/h, 19 dB(A) @ 1 M

**Maximum recommended height:** 12 M

**Max. suction lift:** 2 M

**Maximum unit power:** 16 kW / 54.600 Btu/h

**Max. water temperature:** 40°C


**Discharge tube:** Ø 6 mm

**Protection:** Fully encapsulated, IP-45

**Startup method:** Soft start

**L × W × D:** 82.6 mm × 47.8 mm × 96.9 mm

## DIMENSIONS (mm)

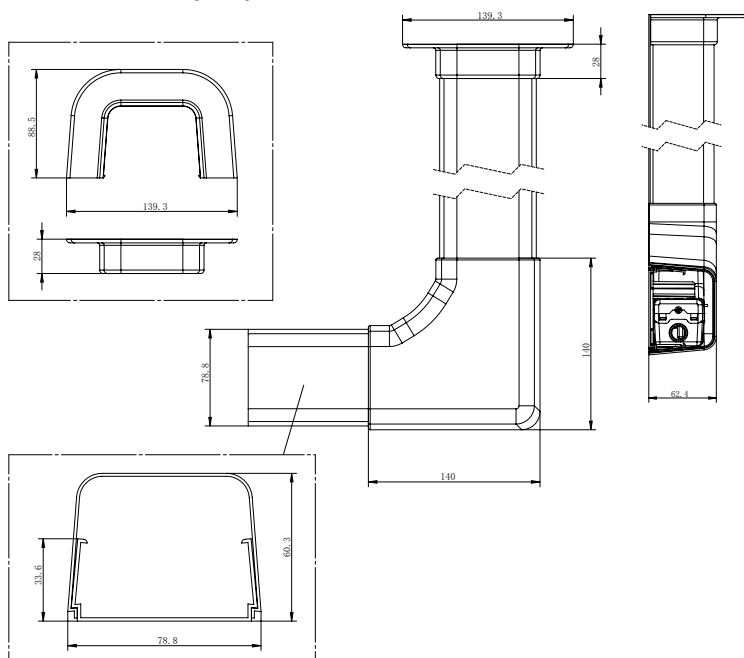


MUND<sup>®</sup>CLIMA



Code: AS06819

## CURVAS

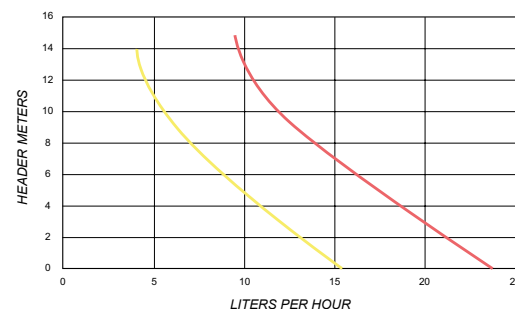

— High Model  
— Low Model

