


## MULTISPLIT Wall Type Indoor Unit MUPR-H11-I Series

**MUNDOCLIMA®**  
SUPER DC INVERTER



RG10A1 (F2S)/BGEF  
Included  
(CL97807)

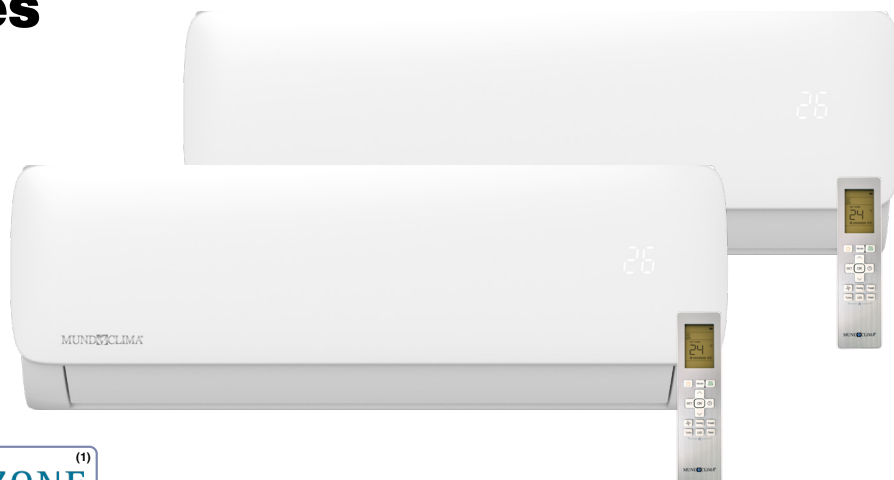

### OPTIONALS

More information on the optionals in "MUNDOCLIMA CONTROL SYSTEMS"

#### Wired control<sup>(2)</sup>



KJR-29B1/BK-E<sup>(2)</sup>  
(CL92869)



KJR-120N(X4W)/BGEF<sup>(1)</sup>  
(CL09211)



KJR-120P(X6W)/EF<sup>(1)</sup>  
(Black)  
(CL09214)



KJR-120P(X6W)/EF<sup>(1)</sup>  
(White)  
(CL09216)

#### Centralized control<sup>(1)</sup>



CCM180A/WS<sup>(1)</sup>  
(CL09300)



CCM30/BKE<sup>(1)</sup>  
(CL92871)



MD-AC-MBS<sup>(1)</sup>  
(CL99097 /  
CL99114-116)



MD-AC-KNX<sup>(1)</sup>  
(CL94792 /  
CL99094-095)



INBACMID<sup>(1)</sup>  
(CL99222/  
CL99210)

#### BMS<sup>(1)</sup>



#### WIFI



EU-OSK-105  
(CL09001)

#### Accessories



H11 Multifunction Module  
(Mod. 09 / 12 / 18: CL97818,  
Mod. 24: CL97819,  
Univ: CL09400)

<sup>(1)</sup> H11 multifunction module required.

<sup>(2)</sup> Connection cable (CL98442) required, not recommended for use with the multifunction module.

### SPECIFICATIONS

Model			MUPR-09-H11-I	MUPR-12-H11-I	MUPR-18-H11-I	MUPR-24-H11-I
Code			UI20055	UI20056	UI20057	UI20058
EAN Code			8432953048860	8432953048884	8432953048907	8432953048921
Cooling	Nominal capacity (min. ~ max.) <sup>(*1)</sup>	kW	2.64 (1.03 - 3.22)	3.52 (1.38 - 4.31)	5.28 (1.93 - 6.27)	7.03 (3.02 - 8.79)
	Nominal rating <sup>(*2)</sup>	W	0.021	0.023	0.036	0.068
Heating	Nominal capacity (min. ~ max.) <sup>(*1)</sup>	kW	2.93 (0.82 - 3.37)	3.81 (1.07 - 4.38)	5.57 (1.29 - 7.00)	7.33 (1.52 - 9.47)
	Nominal rating <sup>(*2)</sup>	W	0.021	0.023	0.036	0.068
Air flow rate (High / Medium / Low)		m <sup>3</sup> /h	520 / 460 / 330	530 / 400 / 350	800 / 600 / 500	1,090 / 770 / 610
Sound pressure (High / Medium / Low)		dB (A)	37 / 32 / 22	37 / 32 / 22	41 / 37 / 31	46 / 37 / 34
Sound power (High)		dB (A)	54	56	56	62
Refrigeration pipes	Liquid	mm (inch)	1/4"	1/4"	1/4"	3/8"
	Gas	mm (inch)	3/8"	3/8"	1/2"	5/8"
Dimensions (W x H x D)		mm	726 x 291 x 210	835 x 295 x 208	969 x 320 x 241	1083 x 336 x 244
Weight		kg	8	8.7	11.2	13.6

#### Notes:

<sup>(\*1)</sup> The nominal capacity may be different depending on the outdoor unit connected and the simultaneity, for more information please consult.

<sup>(\*2)</sup> The indicated consumption only refers to the indoor unit, this must be added to the consumption of the corresponding outdoor unit.

\* The design and specifications are subject to change without prior notice for product improvement.

\*\* The sound level values correspond to values obtained in an anechoic chamber.